
CATERPILLAR OEM SOLUTIONS

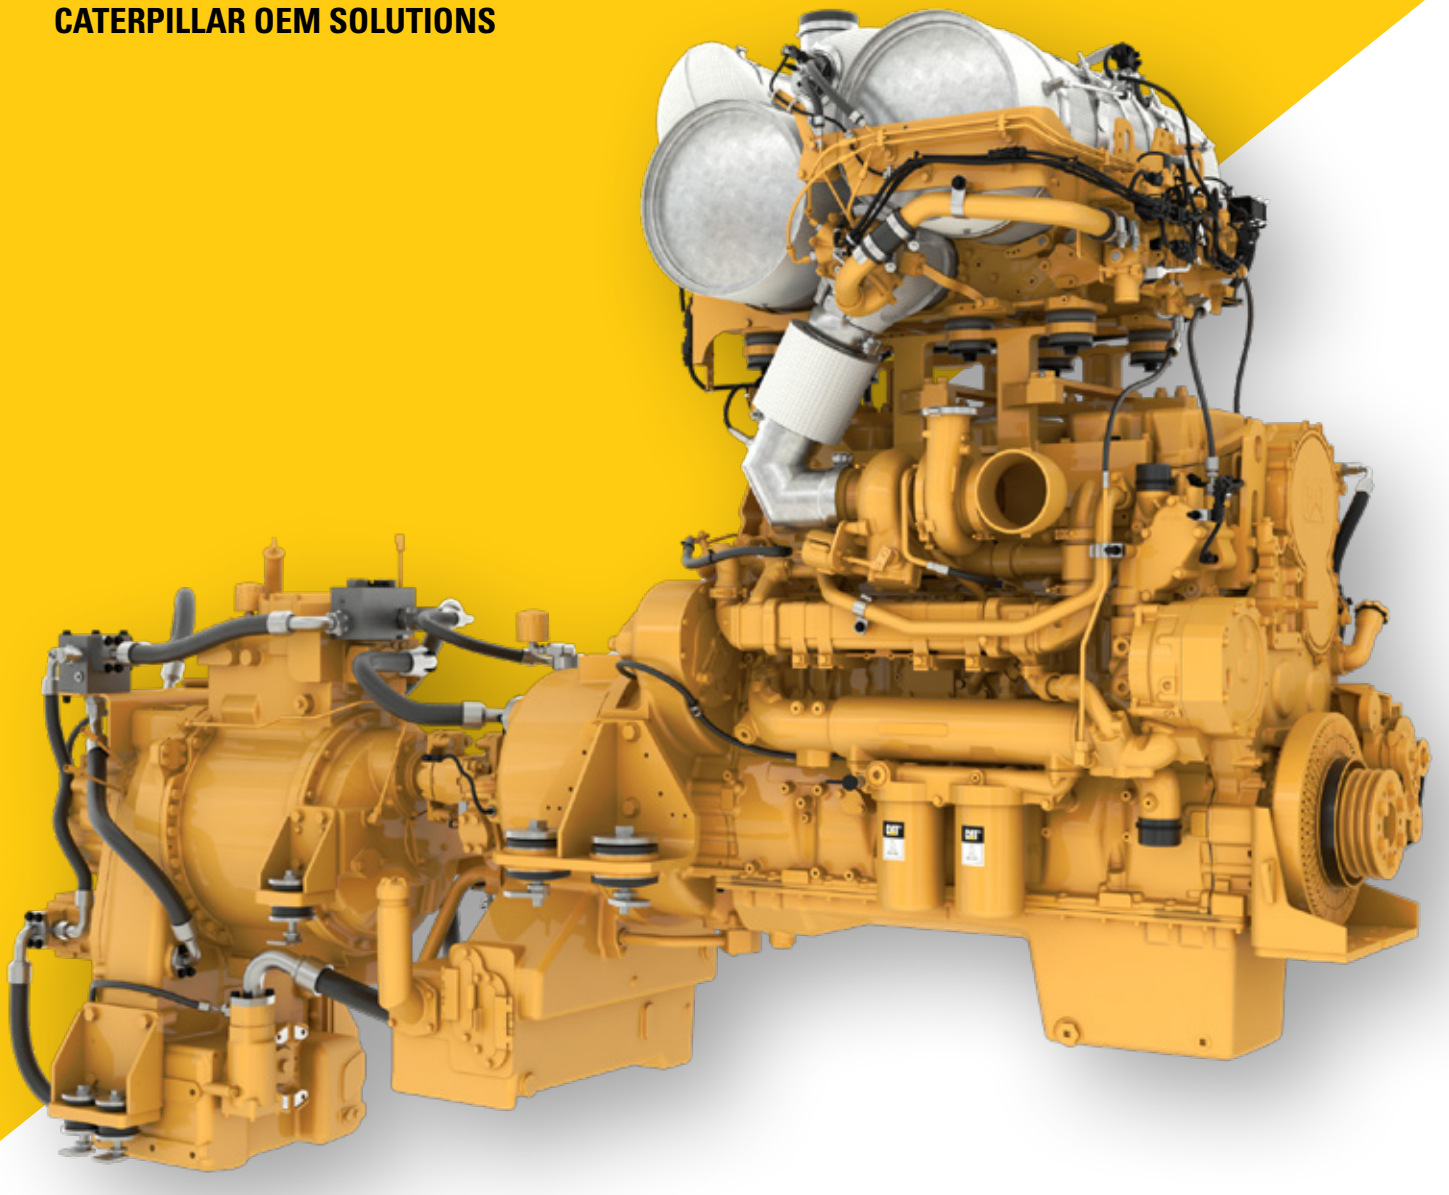

CAT® POWER MODULE
C18 & TR43-M44
470 kW / 630 hp

INTRODUCING

CAT POWER MODULES FOR RAIL APPLICATIONS

Caterpillar OEM Solutions provides electronic and electrical components and systems, which enhance the value of your customers' products.

For more than 65 years, we have been providing real-world solutions for the industries we serve. And now we are offering an integrated power module which includes a Cat® engine coupled with a Caterpillar transmission for the rail industry.

The Cat C18 Industrial Diesel Engine is offered in ratings ranging from 429-470 kW (575-630 hp) @ 1,800-2,000 rpm. These ratings meet EU Stage V, U.S. EPA Tier 4 Final, Japan 2014, Korea Tier 4 Final, and China Nonroad IV emission standards.





HIGH POWER DENSITY

+ Exceptional power density enables you to use a smaller displacement engine and optimize the installation in your application.
+ Torque back-up and high torque at low speed delivers outstanding block acceptance.

RELIABLE, QUIET, DURABLE POWER THAT MAXIMIZES UPTIME

+ World-class manufacturing capability and processes coupled with proven core engine and integral transmission designs assure reliability, quiet operation, and many hours of productive life.
+ Caterpillar Industrial Engines and Transmissions have been validated in a wide variety of applications, including Locomotive and Rail.
+ Electronic control systems are proven to withstand severe conditions.
+ Simple, efficient turbochargers deliver top performance.
+ Aftertreatment module enables quieter engine.
+ Same transmissions have been used in Rail industry for more than 20 years.

HIGH QUALITY

+ Cat engines and transmissions are manufactured to stringent standards for customer satisfaction.
+ Superior dealer service network and world-class product support offered through global Cat dealer network.
+ Scheduled maintenance, including S•O•S sample, reduces operating cost.
+ Extended Service Coverage (ESC) and Customer Value Agreements (CVA) available.
+ Core engine platforms deliver long life to overhaul and engines are designed to be remanufactured
+ Available aftertreatment systems for highly regulated models are built to withstand extreme conditions.

FLUID & FUEL EFFICIENCY


+ Caterpillar integration expertise optimizes engine performance for maximum efficiency.
+ Fluid consumption optimized to match operating cycles for a wide range of equipment and applications while maintaining low operating costs.
+ Engine oil service hours increased from 250 hours to 500 hours (capable of 1000 hours).

AFTERTREATMENT FEATURES

+ Meets EU Stage V, U.S. EPA Tier 4 Final, Japan 2014, Korea Tier 4 Final, and China Nonroad IV emission standards.
+ Clean emissions module (CEM) consisting of diesel oxidation catalyst (DOC) and combined diesel particulate filter (DPF) and high-efficiency selective catalytic reduction (SCR).
+ Maximum uptime with transparent aftertreatment regeneration, without operator distraction or impact to machine performance.
+ PETU DEF capacity up to 93.7 liters (24.8 U.S. gallons).
+ Minimum 5,000 hour service interval for DPF/PETU filters.

LOW-COST MAINTENANCE

+ Ideal for high-hour applications over 10,000 hours.
+ Minimum 5000-hour diesel particulate filter (DPF) service interval enables low-cost maintenance.
+ Standard service intervals of 500 hours under normal operating conditions.
+ The S•O•S℠ program is available from your Cat dealer to optimize oil change intervals.
+ Precise measurement and control enable better fluid efficiency during aftertreatment regeneration.

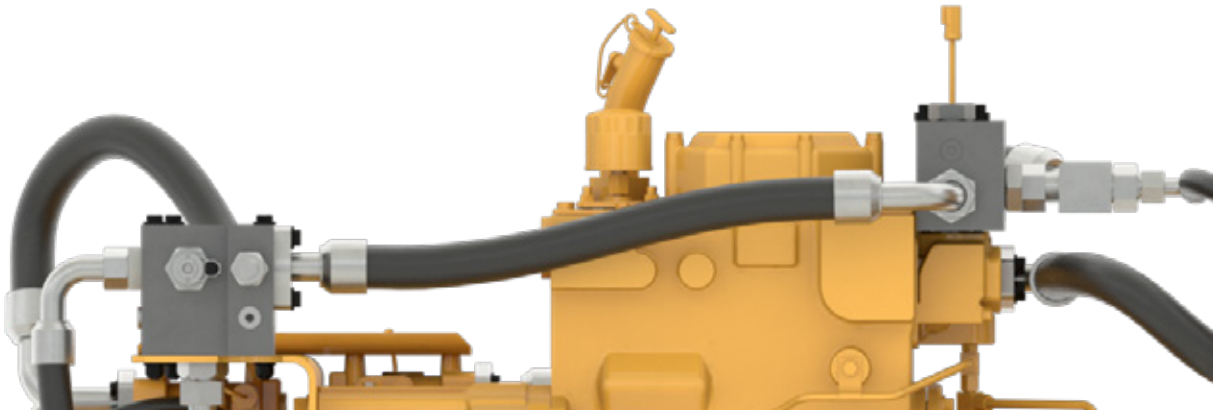


INTEGRATED ENHANCED ELECTRONICS

+ The C18 is equipped for the future with the latest technology from a single on-engine ECM.
+ 2-wire Ethernet connection allows for simpler, faster installation and for remote service and software flash.
+ Transmission ECM available for additional safety and advanced control features:
  - Automatic or Manual Shift Mode: Operator can request operation in a specific gear.
  - Vehicle Speed Limit: The controller limits vehicle speed to a configurable value.
  - Traction Control: Proactively prevents wheel slip from occurring.
  - Park Brake Control: Assists in incline start conditions and prevents machine from moving when not powered.
  - Vigilance/Alerter System: Safety feature that stops the machine if the operator does not regularly demonstrate alertness.
  - Dual power control system: Allows the two machines to operate individually or in dual power mode, with the two machines mechanically and electronically coupled together. Locomotives can be connected in any orientation relative to each other. The controller includes “Master Cab” arbitration.

EASY INSTALLATION

+ Compact engine aftertreatment and integral transmission and torque converter minimize package size. Ideal for equipment with narrow compartments.
+ Aftertreatment installation flexibility to meet all applications – including remote mount and engine-mounted options from the factory.
+ Low heat rejection levels allow for optimized cooling package at equivalent power.
+ Fully integrated hydraulics, including pumps, hoses, valves and filters, enables easy installation and protects the transmission during dead-engine towing.
+ Flexible transmission oil level gauge installation allows easier routing checks.

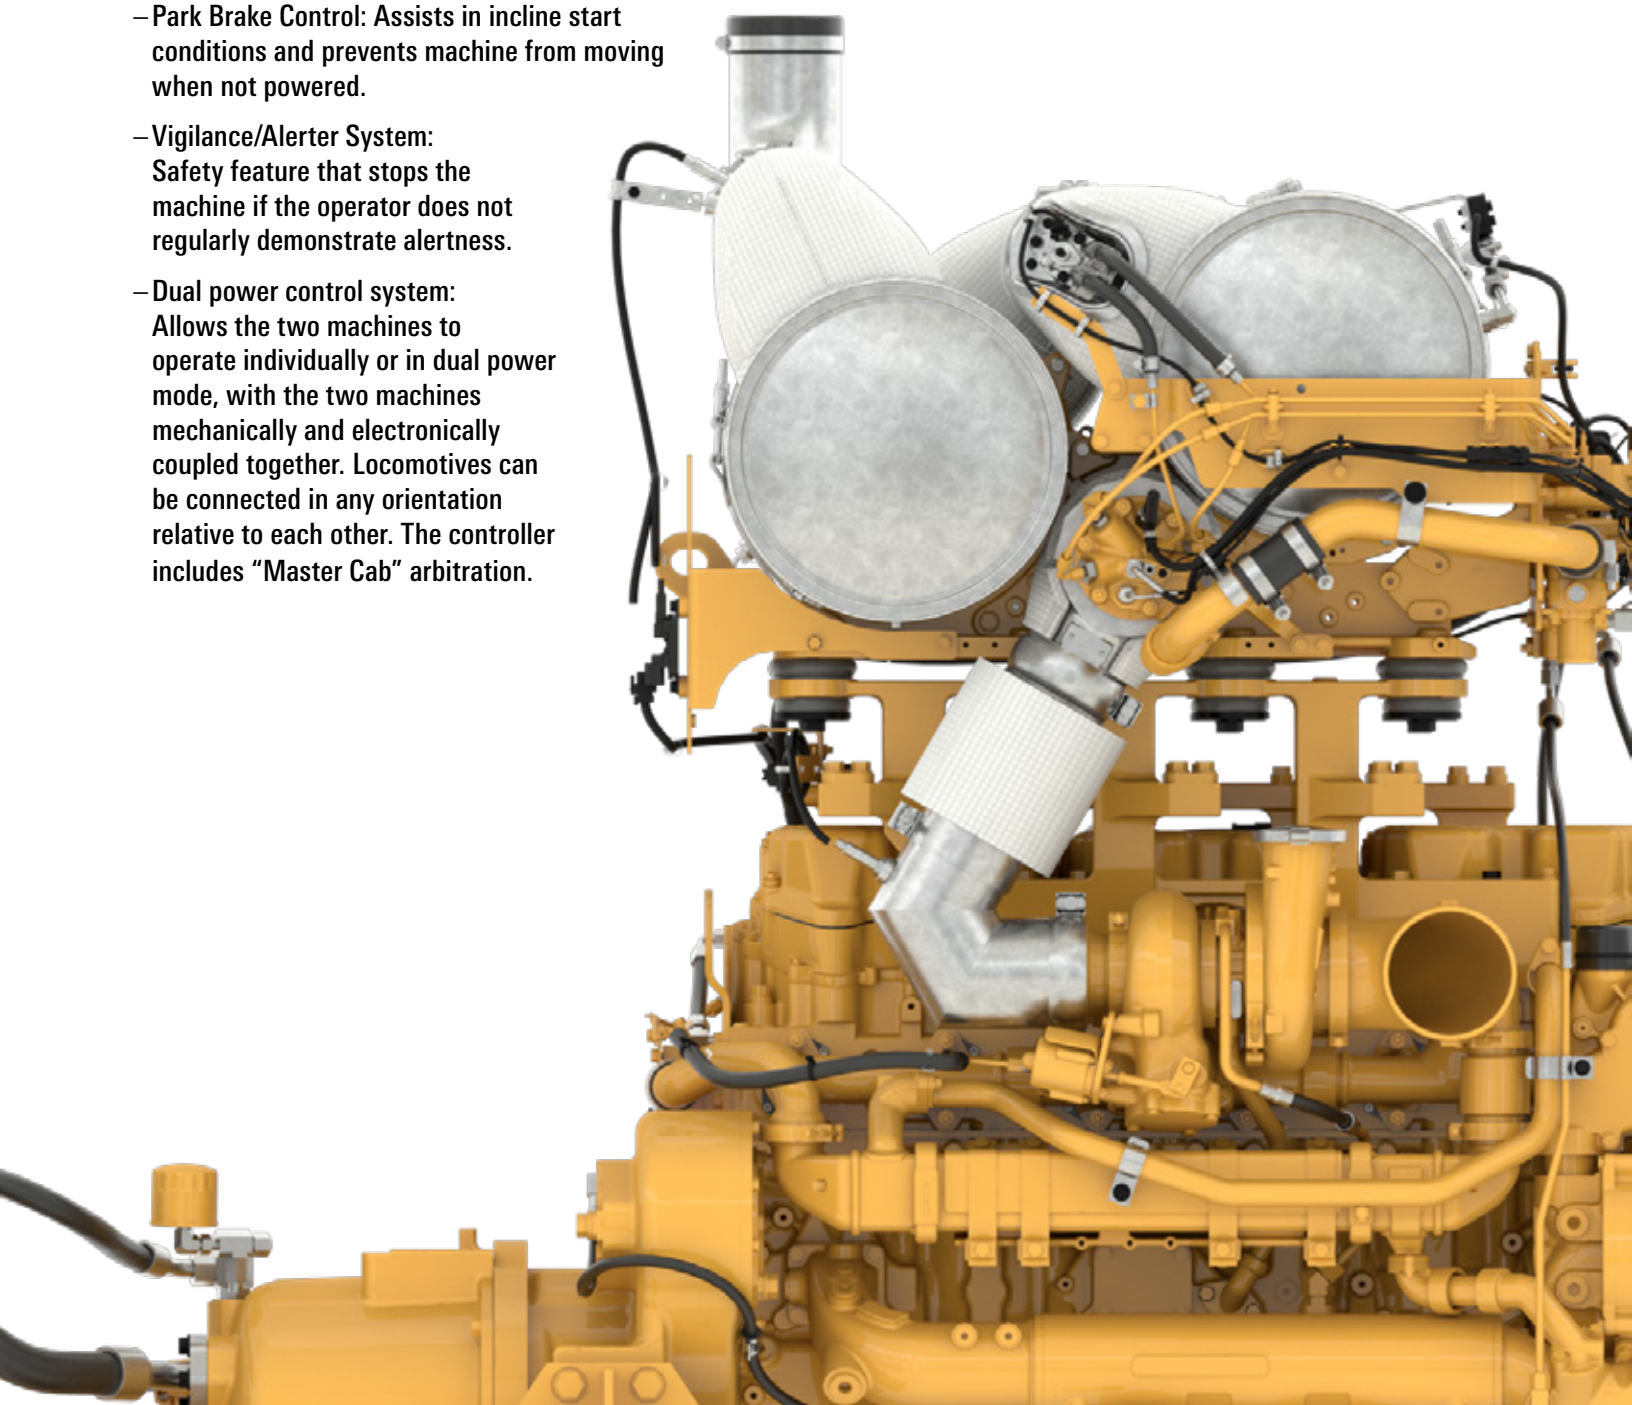

INTEGRATED ELECTRONIC CONTROL FEATURES

WITH DUAL POWER CONTROL SYSTEM

Allows the two machines to operate individually or in dual power mode, with the two machines mechanically and electronically coupled together. Locomotives can be connected in any orientation relative to each other. The controller includes “Master Cab” arbitration.

OPTIMIZED SHIFT POINTS

Shift points are optimized to accommodate various applications.

CONTROLLED THROTTLE SHIFT

Upon shift, transmission sends a command to bring engine speed to required value expected at end of shift to provide smooth shifts.

AUTOMATIC OR MANUAL SHIFT MODE

Operator can request operation in a specific gear.

VEHICLE SPEED LIMIT

The controller limits vehicle speed to a configurable value.

LIMP HOME MODE

Ability to safely control machine in the presence of serious failure.

TRACTION CONTROL

Proactively prevents wheel slip from occurring.

PARK BRAKE CONTROL

Assists in incline start conditions. Prevents machine from moving when not powered.

NEUTRAL LATCH

Controls engine speed without engaging the transmission in order to charge air systems and warm up hydraulics before traveling.

VIGILANCE/ALERTER SYSTEM

Safety feature that stops the machine if the operator does not regularly demonstrate alertness.

GENERATOR MODE


Commands a specific engine speed in order to run an external PTO.



NEW DISPLAY PLATFORM

Robust Touch Screen with high definition graphics provides a faster response and boot time.


- Gateway for remote product support
- Software Updates wirelessly with free Smart Phone or Tablet app
- Over The Air (OTA) software update and remote into machine capability
- Machine Configuration can be done on screen vs. ET
- Capability to configure machine via display (no ET needed)
- Diagnostic logging and telemetry
- Service literature available via PDF on display
- Quick development and change request capability
- Family of master displays available in sizes of 7" and 10”
- Fully programmable for use in any machine application as a master controller
- Full graphical, diagnostic and CAN gateway capability
- Capacitive Touchscreen interface is offered for interactive, intuitive HMI
- Available with IP-camera support with secure proprietary IP WiFi communication

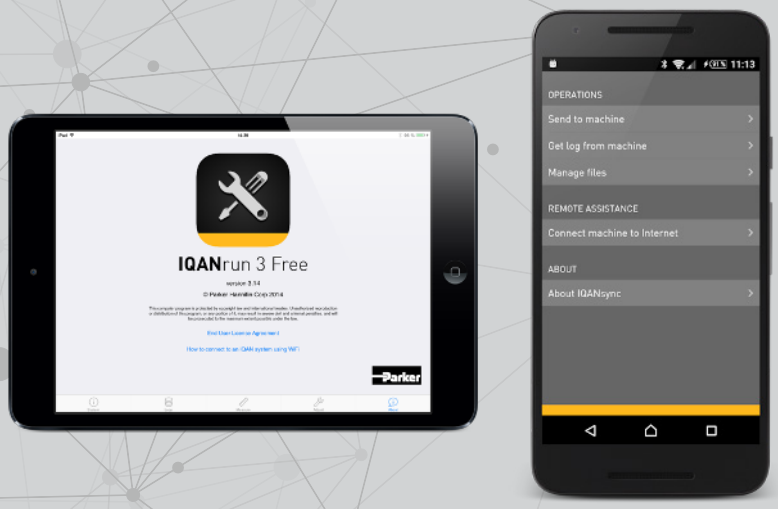


DISPLAY CONNECTIVITY

+ Bluetooth connectivity and programming via smart phone App.
  – No Cat Comm Adapter needed
+ Smart phone/Tablet App allows remote machine access and datalogging to Cat systems.
  – Available on both Apple or Android system
+ Laptop service tool available via internet download (additional fees).
  – Via Ethernet connector or wireless

REAL-TIME MONITORING

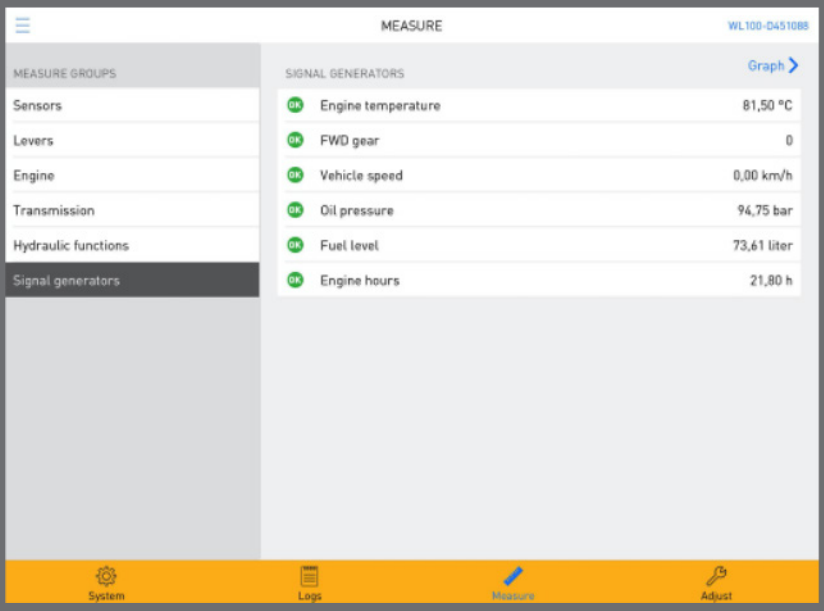

DIAGNOSTICS

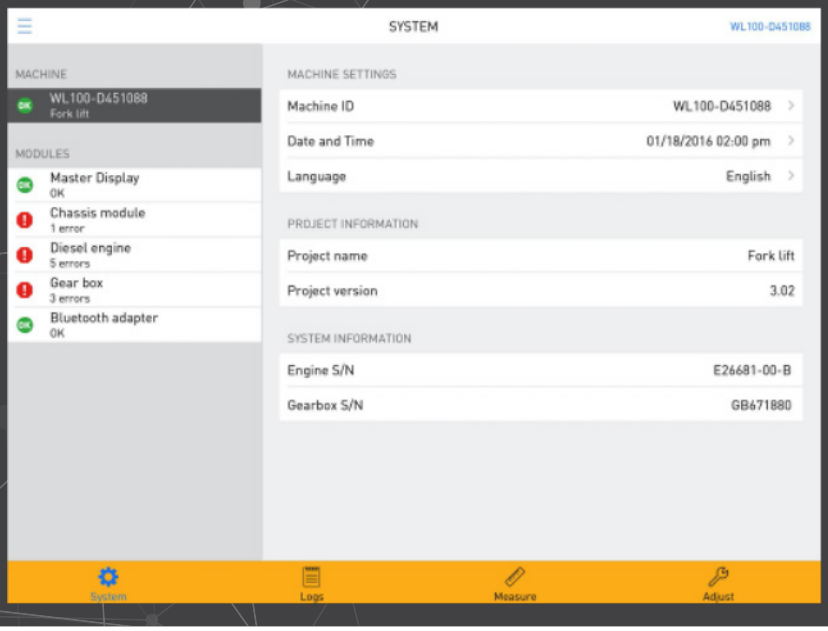

POWERED BY THE CAT® C18 ENGINE

The Cat C18 Industrial Diesel Engine is offered in ratings ranging from 429-470 kW (575-630 hp) @ 1,800-2,000 rpm. These ratings meet EU Stage V, U.S. EPA Tier 4 Final, Japan 2014, Korea Tier 4 Final, and China Nonroad IV emission standards.

POWER RATING – SINGLE TURBO		
Minimum Power	429 kW	575 hp
Maximum Power	470 kW	630 hp
Rated Speed		1,800-2,100 rpm

EMISSION STANDARDS

EU Stage V, U.S. EPA Tier 4 Final, Japan 2014, Korea Tier 4 Final, and China Nonroad IV Emission Standards.


GENERAL		
Engine Configuration		Inline 6, 4-Stroke-Cycle Diesel
Bore	145 mm	5.7 in
Stroke	183 mm	7.2 in
Displacement	18.1 L	1104.5 in^3
Aspiration		Turbocharged Aftercooled (TA)
Compression Ratio		16.0:1
Combustion System		Direct Injection
Rotation (from flywheel end)		Counterclockwise
Cooling System Capacity (engine)	27 L	28 qts
Lube System (refill)	40-72 L	10.5-19.0 gal

ENGINE DIMENSIONS (APPROXIMATE. FINAL DIMENSIONS DEPENDENT ON SELECTED OPTIONS.)		
Length	1438 mm	56.6 in
Width	969 mm	38.1 in
Height	1248 mm	49.1 in
Weight – Net Dry (Basic Operating Engine Without Optional Attachments)	1542 kg	3399.5 lb

AFTERTREATMENT DIMENSIONS (APPROXIMATE. FINAL DIMENSIONS DEPENDENT ON SELECTED OPTIONS.)		
Length	1153 mm	45.4 in
Width	1112 mm	43.8 in
Height	652 mm	25.7 in
Weight	268 kg	590.8 lb

STANDARD EQUIPMENT

C18 ENGINE

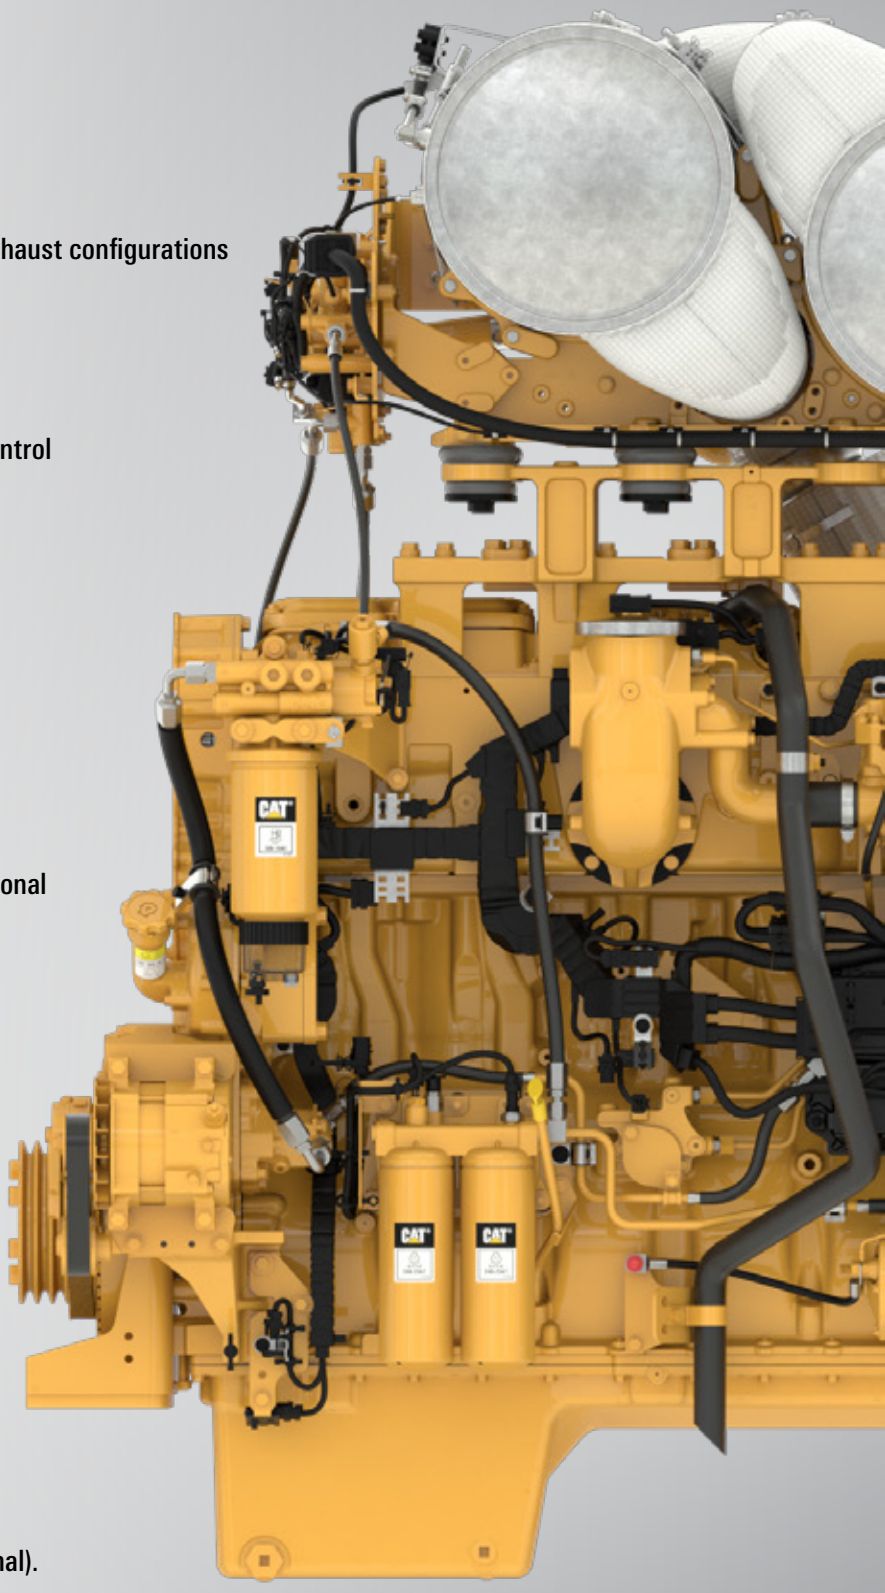

Air Inlet System
- » Turbocharged
- » Air-to-Air Aftercooled
- » Mid-mount turbocharged system with front and rear exhaust configurations

Control System
- » Electronic control system
- » Over-foam wiring harness
- » Configurable software features
- » Engine monitoring system SAE J1939 broadcast and control
- » Integrated Electronic Control Unit (ECU)
- » Remote fan control
- » 12V and 24V available

Cooling System
- » Vertical outlet thermostat housing
- » Centrifugal water pump
- » Guidance on cooling system design available through your dealer to ensure equipment reliability

Flywheels and Flywheel Housing
- » SAE No. 0 and SAE No. 1 flywheel housings
- » Available SAE 1 power take-off (PTO) housing with optional SAE B and SAE C power take-off drives
- » Engine power can also be taken from the front of the engine with optional attachments

Fuel System
- » Mechanical Electronic Unit Injectors (MEUI)
- » Primary fuel filter
- » Secondary and tertiary fuel filters
- » Fuel transfer pump
- » Electronic fuel priming

Lube System
- » Oil cooler
- » Oil filler
- » Lube oil filter
- » Oil dipstick
- » Gear-driven oil pump
- » Choice of front, rear or center sumps
- » Open crankcase ventilation system on C18 engines with ratings less than 560 kW (OCV filter system optional).

Power Take-off (PTO)
- » SAE 1 PTO available with optional SAE B and SAE C PTO drives
- » Engine power can also be taken from the front of the engine on some applications

General
- » Caterpillar Yellow paint, with optional colors available

C18 ENGINE RATING DEFINITIONS AND CONDITIONS

IND-A (Continuous) for heavy duty service where the engine is operated at maximum power and speed up to 100% of the time without interruption or load cycling.


IND-B for service where power and/or speed are cyclic (time at full load not to exceed 80%).

IND-C (Intermittent) is the horsepower and speed capability of the engine where maximum power and/or speed are cyclic (time at full load not to exceed 50%).

IND-D for service where maximum power is required for periodic overloads (time at full load not to exceed 10% of the duty cycle).


Diesel Engines – greater than 7.1 liter.
All rating conditions are based on SAE J1995, inlet air standard conditions of 99 kPa (29.31 in Hg) dry barometer and 25°C (77°F) temperature. Performance measured using a standard fuel with fuel gravity of 35° API having a lower heating value of 42,780 kJ/kg (18,390 btu/lb) when used at 29°C (84.2°F) with a density of 838.9 g/L.

PERFORMANCE DATA

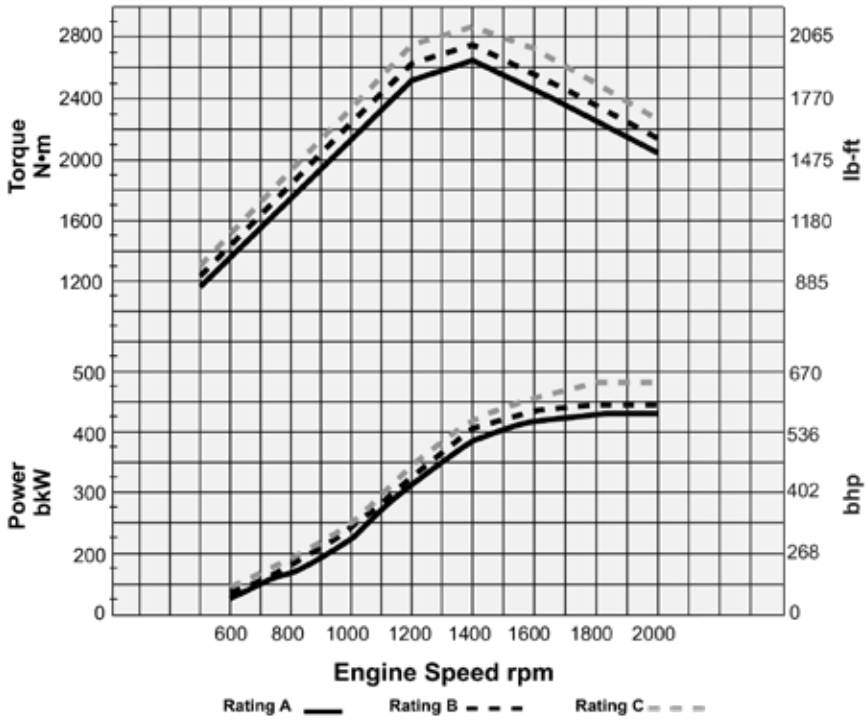

Rating	Aspiration	Rated Speed rpm	Rated Power bkW	Rated Power bhp	Peak Torque N•m	Peak Torque lb-ft	Speed rpm
A	TA	1800-2000	340	456	2082	1536	1400
B	TA	1800-2000	370	496	2266	1671	1400
C	TA	1800-2000	400	536	2450	1807	1400

MORE POWER, HIGHER TORQUE, LESS SYSTEM WEIGHT
AND IMPROVED FUEL ECONOMY

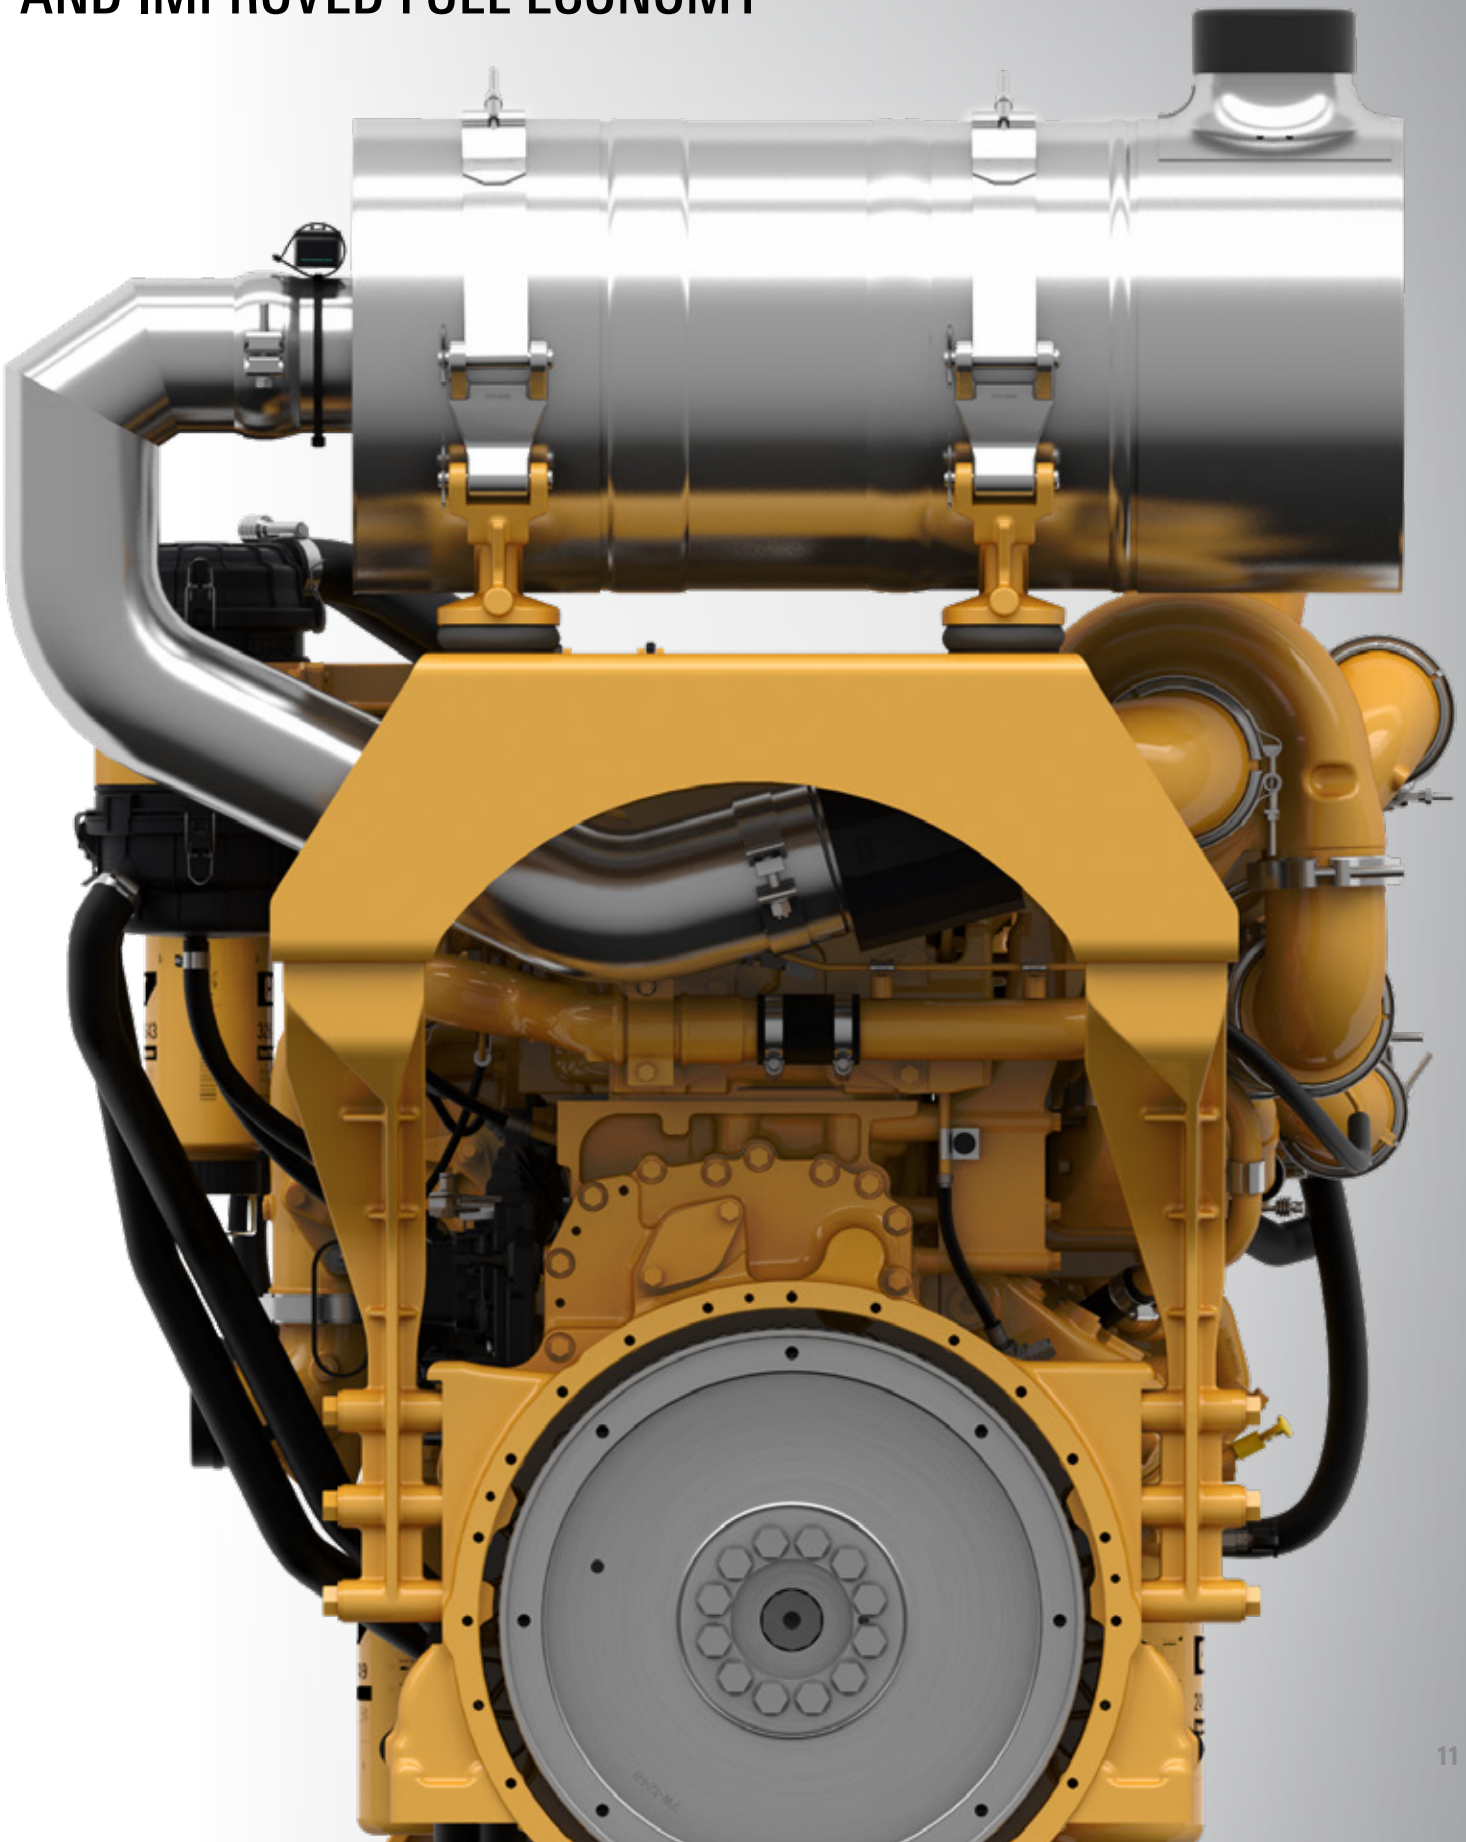

DRIVEN BY THE CAT TR43-M44 TRANSMISSION
WITH INTEGRAL TORQUE CONVERTER

MODEL DESCRIPTION

TR – Transmission, Reversing
43 – Clutch Plate Diameter in Centimeters
M – Mid-Mount Installation Configuration
4 – Number of Forward Gears
4 – Number of Reverse Gears

APPLICATIONS

Typical applications for the TR43-M44 include 2WD or 4WD locomotive, subway and railway applications.

It can also be used by other vehicles that frequently make directional changes during a normal work cycle.

OPTIONS

Dead Engine Towing Pump
Engine-Mount Configurations Available

RATINGS

Maximum Input Power	470 kW	630 hp
Maximum Input Torque	2769 N•m	2,043 lb-ft
Maximum Input Speed		2,100 rpm
Minimum Input Speed		700 rpm

ROTATION

Input Rotation	SAE J824 Standard, Counterclockwise
Output Rotation	Forward: Clockwise / Reverse: Counterclockwise

CONNECTIONS


Input	Yoke (9C)
Output	Yoke (10C) x 2
Electrical Power	12V or 24V
Electrical Control	1 Bundle
Hydraulic Connections	Oil Cooler, Filter and TC


CLUTCHES

Electro-Hydraulic Oil Cooled, Multidisc	
Clutch Modulation Control	Cat® Electronic Long Range Transmission (ELRT)

WEIGHT

Approximate Dry Weight (Transmission)	1503 kg	3,314 lb
Approximate Dry Weight (Torque Converter)	386 kg	851 lb

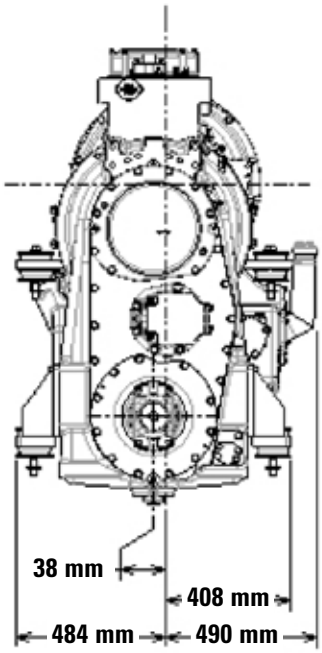

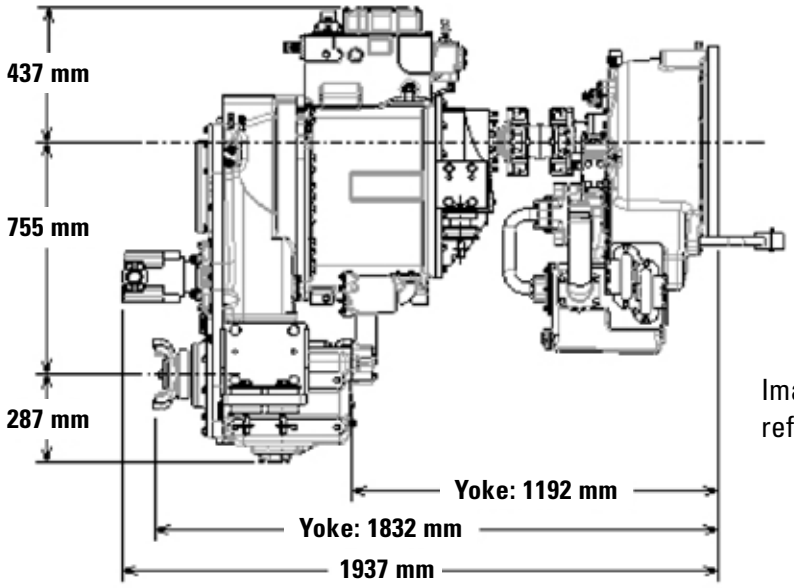

Images shown for reference only

TORQUE CONVERTER OPTIONS

Series	TC45, TC46, TC53 with Lock-Up Clutch
Stall Torque Ratio Range	2.29-3.08

AUXILIARY PUMP DRIVES ON TORQUE CONVERTER (OPTIONAL)

Up to 2 PTOs Integral Live Drive From Input Shaft	
Location	1:00 and 11:00
Mountings	Up to 1 Front-Facing Mounting Pad / Up to 2 Rear-Facing Mounting Pads
Rated Torque	37 kW / 50 hp (Each)


OIL SYSTEM


Oil	Transmission/Drive Train Oil–4 (TDTO™)	
Sump Oil Temperatures	Continuous: 95°C (203°F) Max. Intermittent: 116°C (241°F) Max. Converter Outlet Temperature: 124°C (255°F)	
Hydraulic Fill Capacity	95 L	20.9 gal
Filter Type	8-Micron Paper Cartridge, Remote Mounted	


GEAR RATIOS (STANDARD)

Forward	1F 2F 3F 4F	5.945 3.323 1.867 1.057
Reverse	1R 2R 3R 4R	-5.675 -3.172 -1.782 -1.009

DIMENSIONS

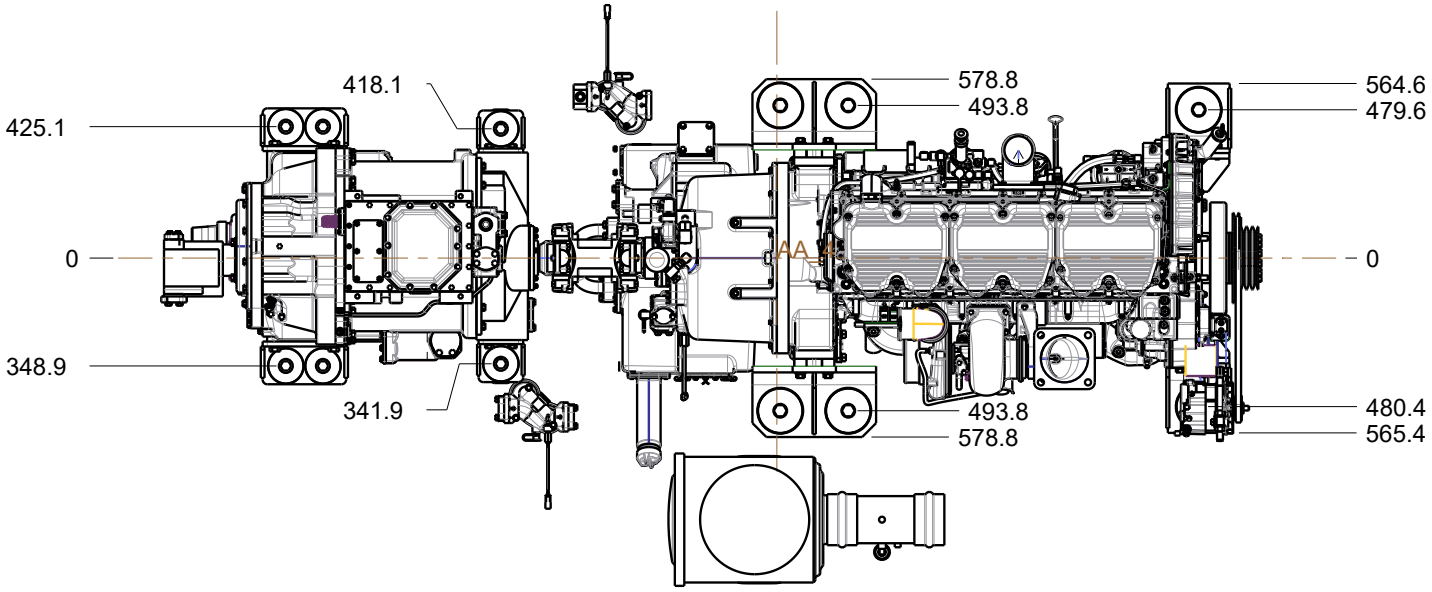
418.1
425.1
0
348.9
341.9
578.8
493.8
564.6
479.6
AA_1
0
493.8
578.8
480.4
565.4

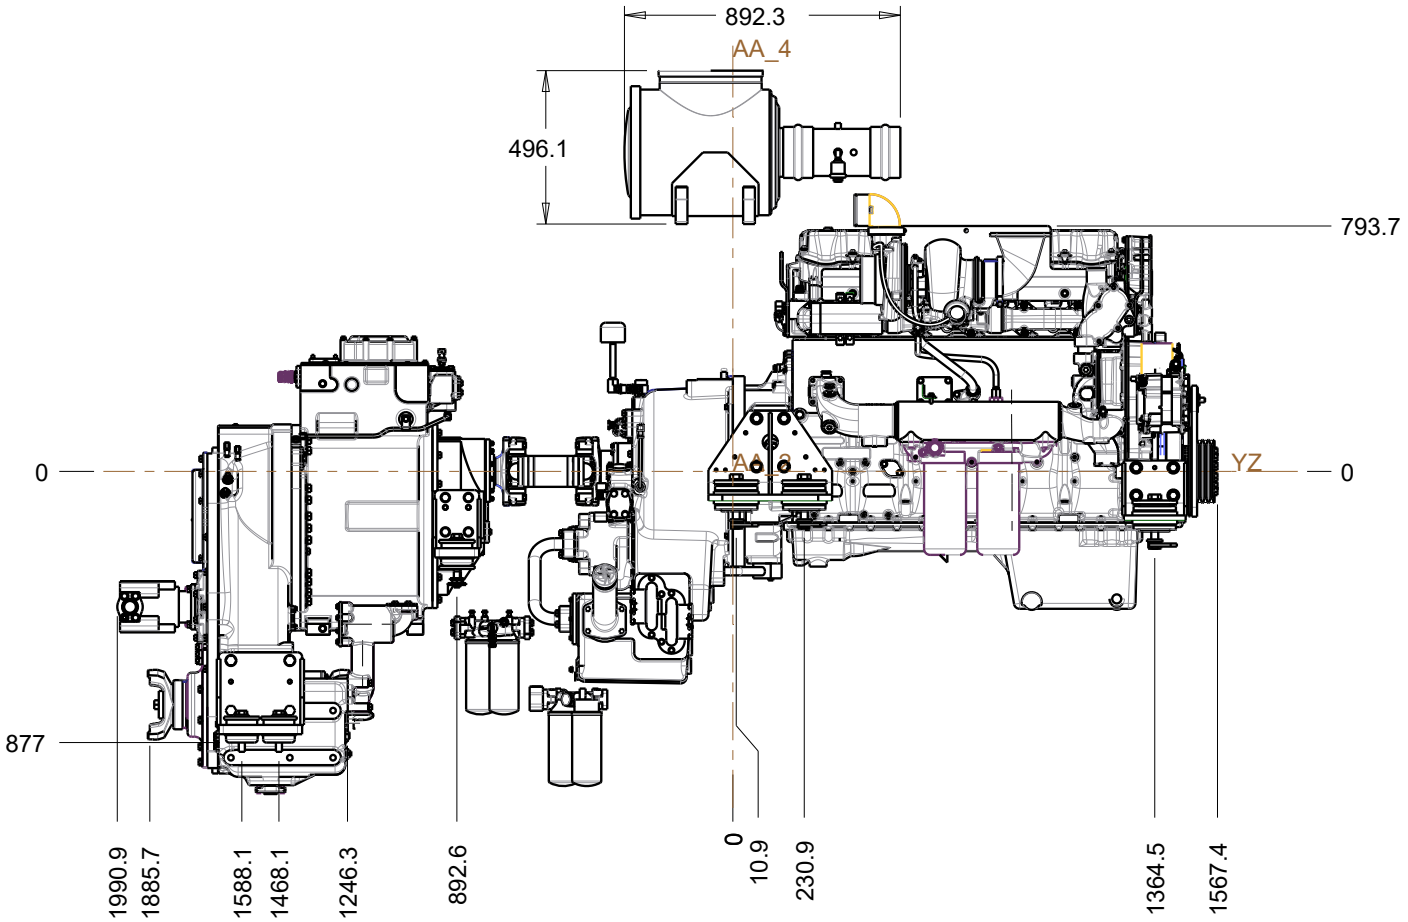
892.3
AA_4
496.1
793.7
0
AA_2
YZ
0
877
1990.9
1885.7
1588.1
1468.1
1246.3
892.6
0
10.9
230.9
1364.5
1567.4

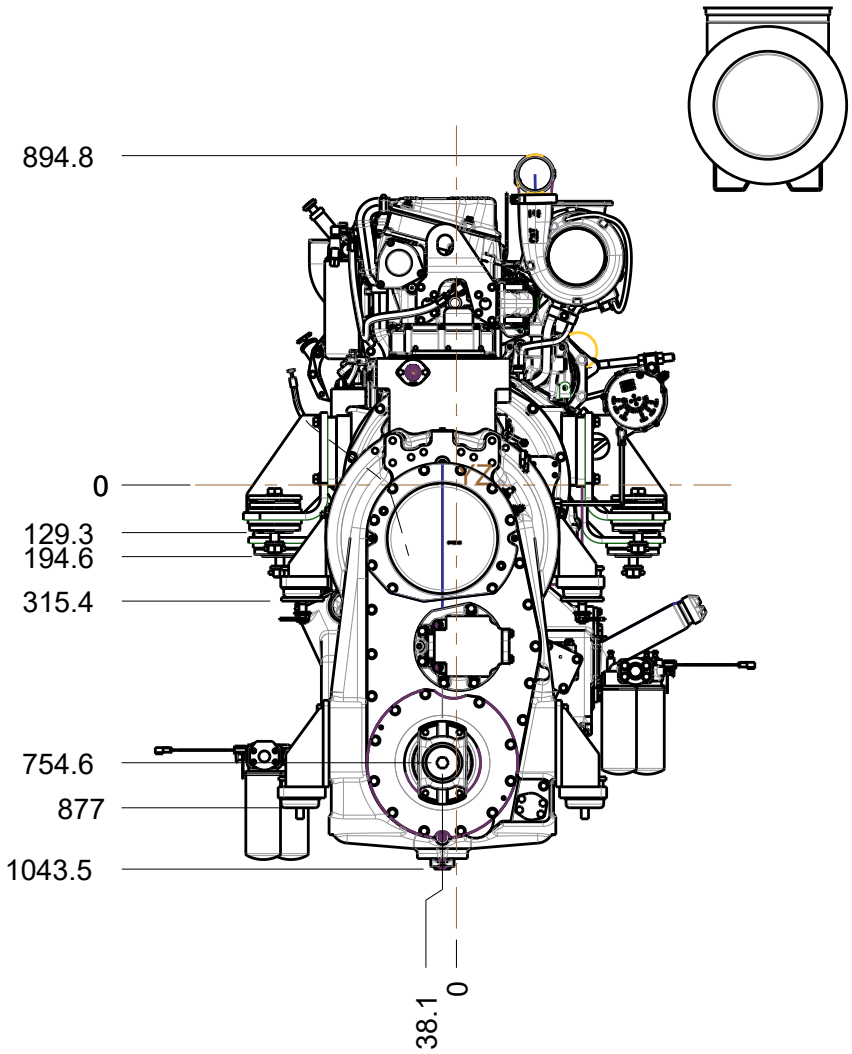
894.8
0
129.3
194.6
315.4
754.6
877
1043.5
38.1
0



SERVICE & SUPPORT

WE'RE PREPARED WITH EVERYTHING YOU NEED.

By supporting your engine and operations, the Cat dealer network protects your relationship with your customers.

- Market-leading warranty
- Common service tooling and parts stock coverage
- Industry-leading parts availability
- Extended Service Contracts
- Customer Value Agreements
- Cat® Financial
- Reman options and Cat® Certified Rebuild programs

REMOTE ASSET MONITORING SERVICES THAT MAKE A DIFFERENCE

Combining equipment, technology, and services to help build your success.

CONNECT WITH MORE VALUE, LESS STRESS.

Increase Uptime and Reduce Operating Costs


- Know the location, health, and efficiency of your equipment
- Advanced Proactive Diagnostics
- Receive expert recommendations
- Reduce costs through preventive maintenance, fleet optimization, and equipment lifecycle management

Now there's an easier way to monitor and manage your assets, no matter where they're located.

Enroll in connected services, and let our expertise turn your data into insights that can improve your profitability.





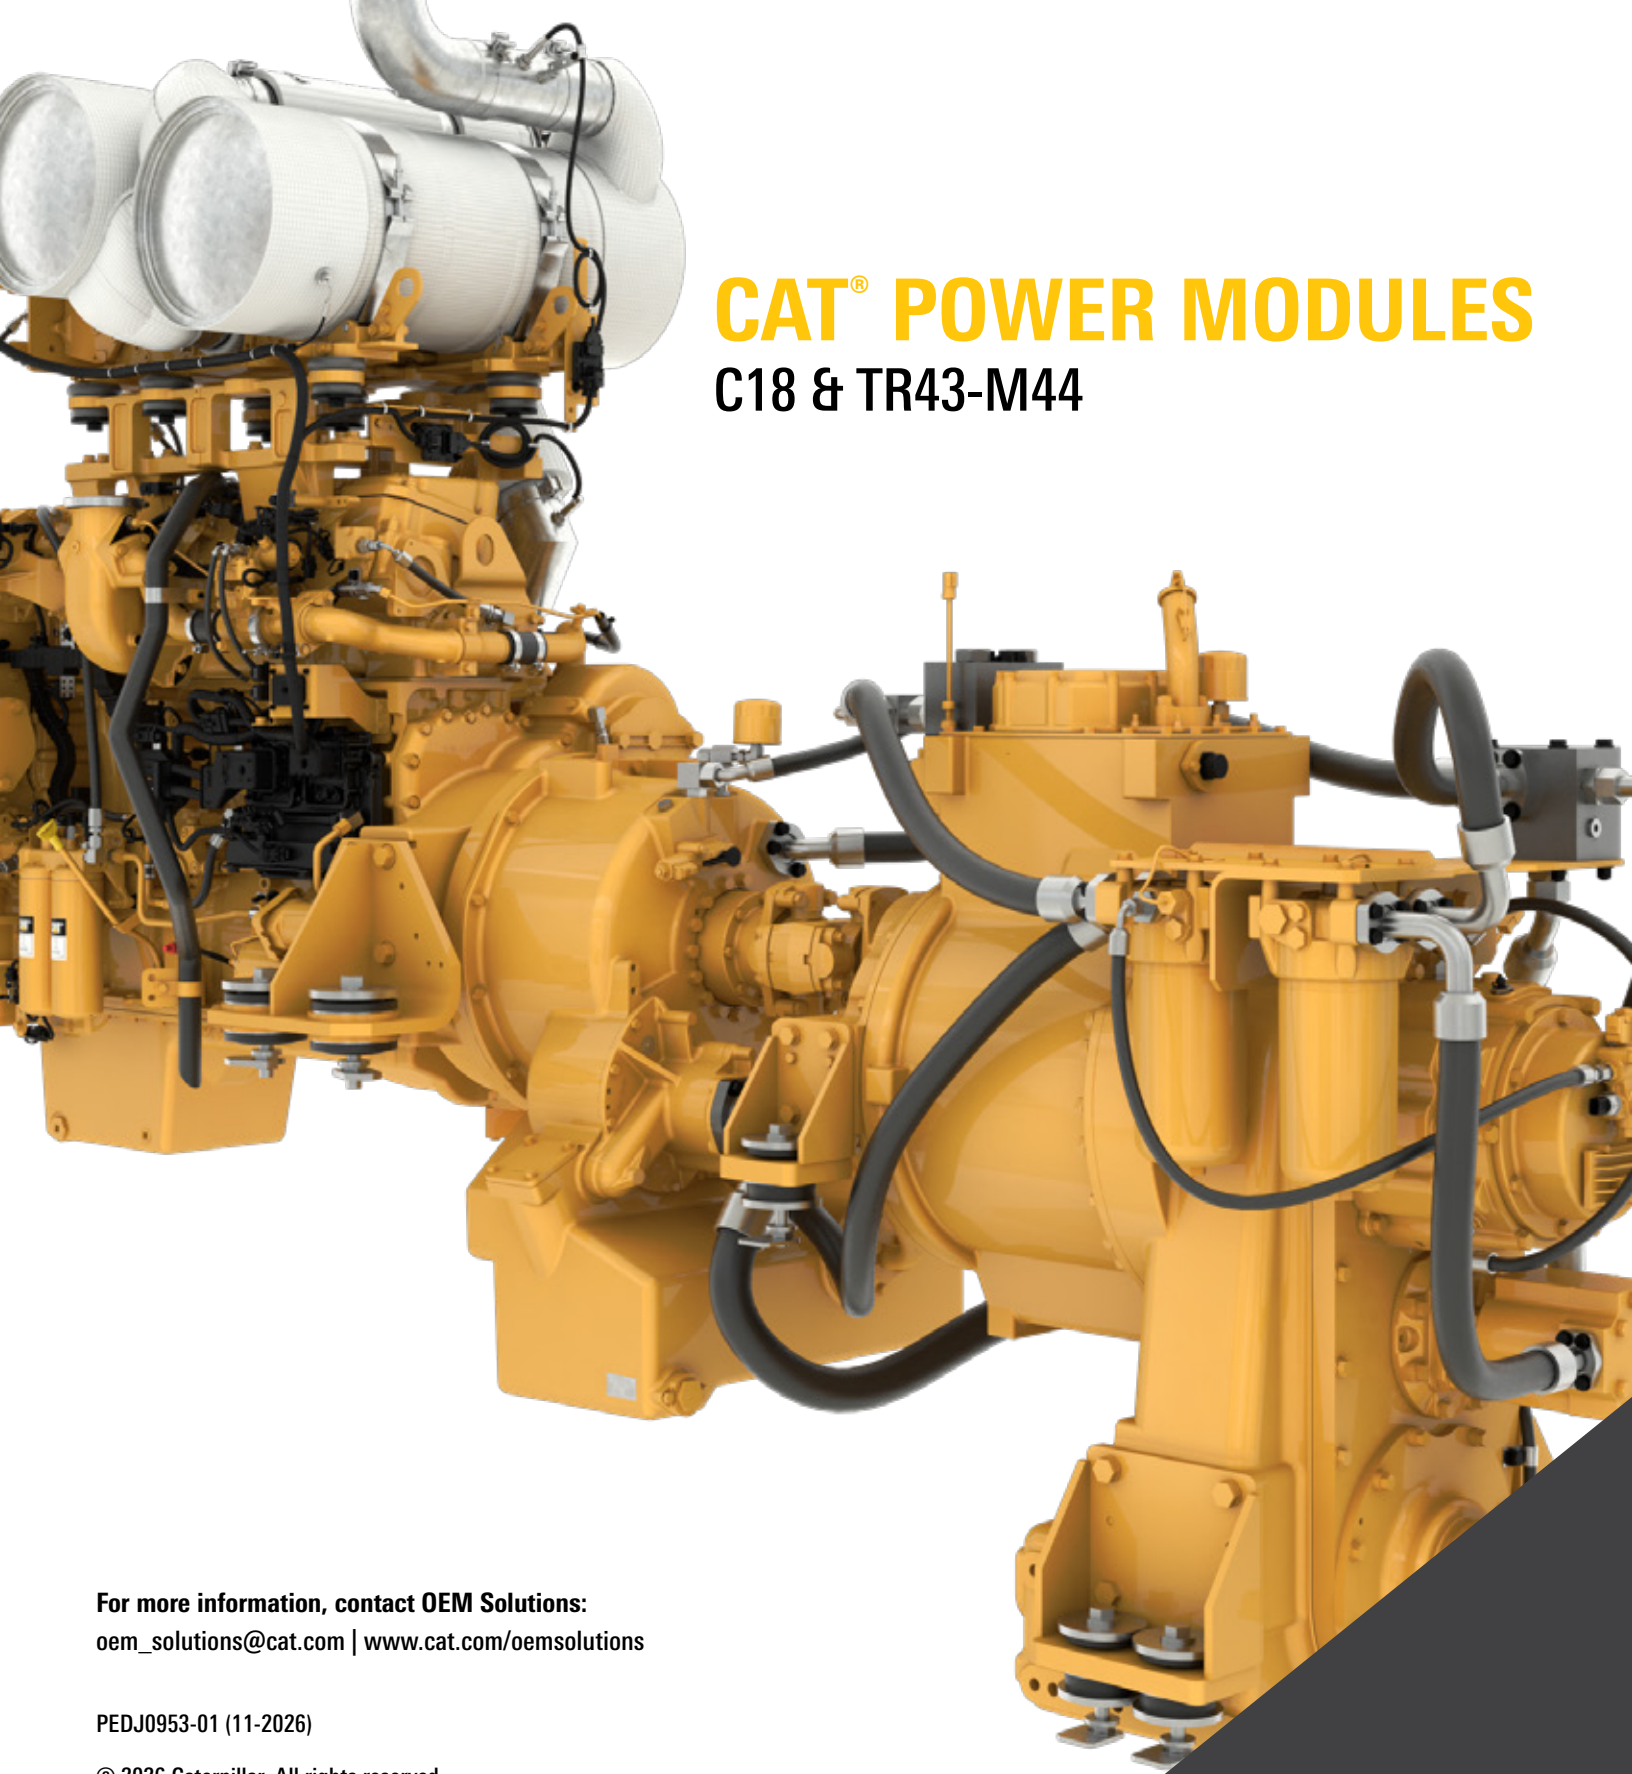

CAT® POWER MODULES

C18 & TR43-M44

For more information, contact OEM Solutions:
oem_solutions@cat.com | www.cat.com/oemsolutions

PEDJ0953-01 (11-2026)

© 2026 Caterpillar. All rights reserved.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.