



# CAT® 772

## OFF-HIGHWAY TRUCK BARE CHASSIS

Caterpillar offers off-highway truck bare chassis designed for specialty machines in a variety of applications — including water trucks, tow tractors, and fuel / lube trucks. When configured as a water truck, the tank capacity is 11,000 gallons (41 500 liters). These partial machine configurations allow construction, quarry, and mining customers to purchase complete solutions from our global Cat® dealer network — with support every step of the way.

### PROVEN CAT TRUCK PLATFORM

Cat trucks are built for durability, reliability, and efficiency to deliver the performance you need in some of the toughest applications around the world.

### APPLICATION-SPECIFIC CAB & ROPS CERTIFICATION

Cat Off-Highway Truck Bare Chassis ROPS is certified to ISO 3471 Tractor criteria, to provide a higher level of protection for towing applications.

### OPERATOR EXPERIENCE

A truck is only as productive as its operator — so we've updated the 772 with some key features to help old and new operators be comfortable and confident while operating the truck. Convenient automatic temperature control and powered left side window. Low-effort access getting in and out of the cab with ample stand up room. Cat Comfort Seat with air suspension and excellent adjustability.

### FUEL SAVINGS

Fuel savings are achieved by reducing power between 0.15 to 15% during all phases of operation. Part throttle shifting has the benefit of saving fuel — it no longer needs to apply fuel towards overcoming lost momentum between shifts.

### SAFETY BUILT IN

As we design a truck, we take the safety of the operator and personnel working on the ground very seriously. Ground level and platform accessible daily check points. Excellent visibility. Solid, stable walking/working platforms with good traction, material shedding, handrails. And the new Traction Control System, returns the truck to solid footing sooner.

### SIMPLE SERVICE

This truck is designed to provide operators and technicians with easy access to common service points like engine lockout, machine system lockout, fluid level sight gauges, grease fittings, and access to the engine for regularly scheduled maintenance.

### SUPPORTED BY THE CAT DEALER NETWORK

- + Full support of Cat dealer and parts network
- + Cat dealer installation & retrofit kits available
- + Eligible for Equipment Protection Plans (EPP) & Customer Value Agreements (CVAs)



# 772 Off-highway Truck Bare Chassis Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

## Engine – U.S. EPA Tier 4 Final/EU Stage V

Engine Model	Cat® C18	
Rated Engine Speed	1,700 rpm	
Gross Power – SAE J1995:2014	451 kW	605 hp
Net Power – SAE J1349:2011	410 kW	550 hp
Number of Cylinders	6	
Bore	145 mm	5.7 in
Stroke	183 mm	7.2 in
Displacement	18.1 L	1,105 in <sup>3</sup>

## Engine – U.S. EPA Tier 3/EU Stage IIIA or U.S. EPA Tier 2/EU Stage II

Engine Model	Cat® C18	
Rated Engine Speed	1,800 rpm	
Gross Power – SAE J1995:2014	451 kW	605 hp
Net Power – SAE J1349:2011	410 kW	550 hp
Number of Cylinders	6	
Bore	145 mm	5.7 in
Stroke	183 mm	7.2 in
Displacement	18.1 L	1,105 in <sup>3</sup>

- Net Power advertised is the power available at the flywheel when the engine is equipped with air intake system, exhaust system, and alternator.
- Ratings based on SAE J1995 standard air conditions of 25° C (77° F) and 100 kPa (29.61 Hg) barometer. Power based on fuel having API gravity of 35 at 16° C (60° F) and an LHV of 42 780 kJ/kg (18,390 BTU/lb) when engine used at 30° C (86° F).
- No engine derating required up to 3000 m (9,843 ft).

## Operating Weights – all configurations

Target Gross Machine Weight	82 100 kg	181,000 lb
-----------------------------	-----------	------------

## Operating Weights – with Hoist Cylinders (LRC)

Bare Chassis Weight	26 863 kg	59,223 lb
Payload	55 237 kg	121,776 lb
Front Axle Bare Chassis Weight	16 118 kg	35,534 lb
Front Axle Payload	11 823 kg	26,066 lb
Rear Axle Bare Chassis Weight	10 745 kg	23,689 lb
Rear Axle Payload	43 441 kg	95,771 lb

## Operating Weights – without Hoist Cylinders (LRC)

Bare Chassis Weight	26 496 kg	58,414 lb
Payload	55 604 kg	122,585 lb
Front Axle Bare Chassis Weight	15 898 kg	35,048 lb
Front Axle Payload	12 017 kg	26,492 lb
Rear Axle Bare Chassis Weight	10 598 kg	23,365 lb
Rear Axle Payload	43 588 kg	96,095 lb

## Operating Weights – with Hoist Cylinders (HRC)

Bare Chassis Weight	27 386 kg	60,376 lb
Payload	54 714 kg	120,623 lb
Front Axle Bare Chassis Weight	16 432 kg	36,225 lb
Front Axle Payload	11 483 kg	25,315 lb
Rear Axle Bare Chassis Weight	10 954 kg	24,150 lb
Rear Axle Payload	43 232 kg	95,310 lb

## Operating Weights – without Hoist Cylinders (HRC)

Bare Chassis Weight	27 019 kg	59,567 lb
Payload	55 081 kg	121,432 lb
Front Axle Bare Chassis Weight	16 211 kg	35,740 lb
Front Axle Payload	11 703 kg	25,800 lb
Rear Axle Bare Chassis Weight	10 808 kg	23,827 lb
Rear Axle Payload	43 378 kg	95,633 lb

- LRC = Lesser Regulated Countries. HRC = Highly Regulated Countries.
- Care must be taken when designing any attachments so that the axle weights are not exceeded.

## Tires

### 21.00R33 (E4)

- Productive capabilities of the 772 truck are such that, under certain job conditions, TKPH (TMPH) capabilities of standard or optional tires could be exceeded and, therefore, limit production.
- Caterpillar recommends the customer evaluates all job conditions and consults the tire manufacturer for proper tire selection.

## Weight Distributions – Approximate

Front Axle – Empty	51.4 %
Front Axle – Loaded	34.2 %
Rear Axle – Empty	48.6 %
Rear Axle – Loaded	65.8 %

# 772 Off-highway Truck Bare Chassis Specifications

## Final Drives

Differential Ratio	2.74:1
Planetary Ratio	4.80:1
Total Reduction Ratio	13.14:1

## Steering

Steering Standards	ISO 5010:2019
Steer Angle	40.5°
Turning Diameter – Front	17.6 m
Turning Circle Clearance Diameter	20.3 m

## Brakes

Brake Surface – Front	1395 cm <sup>2</sup>	216 in <sup>2</sup>
Brake Surface – Rear	50 281 cm <sup>2</sup>	7,794 in <sup>2</sup>
Brake Standards	ISO 3450:2011	

## Cab

Operator Sound Level (ISO 6396:2008) – Tier 4 Final/Stage V	76 dB(A)
Operator Sound Level (ISO 6396:2008) – Tier 3 and Tier 2 Equivalent	82 dB(A)

## Transmission

Forward 1	12.8 km/h	8 mph
Forward 2	17.5 km/h	10.9 mph
Forward 3	23.7 km/h	14.7 mph
Forward 4	31.9 km/h	19.8 mph
Forward 5	43.3 km/h	26.9 mph
Forward 6	58.4 km/h	36.3 mph
Forward 7	79.1 km/h	49.2 mph
Reverse	16.7 km/h	10.4 mph

• Maximum travel speeds with standard 21.00R33 (E4) tires.

## Body Hoists

Pump Flow – High Idle (Tier 4)	425 L/min	112 gal/min
Pump Flow – High Idle (Tier 3/2)	413 L/min	109 gal/min
Relief Valve Setting – Raise	18 950 kPa	2,750 psi
Relief Valve Setting – Lower	3450 kPa	500 psi
Body Raise Time – High Idle	8 seconds	
Body Lower Time – Float	10 seconds	

## Service Refill Capacities

Fuel Tank	530 L	140 gal
Diesel Exhaust Fluid (DEF) Tanks (Tier 4/Stage IV only)	21 L	6 gal
Cooling System	125 L	33 gal
Crankcase	64 L	17 gal
Differentials and Final Drives	180 L	47 gal
Steering Tank	55 L	14.5 gal
Steering System (includes tank)	87 L	23 gal
Brake/Hoist Hydraulic Tank	145 L	38 gal
Brake/Hoist System	227 L	60 gal
Torque Converter/Transmission System	64 L	17 gal






## Suspension

Empty to Loaded Cylinder Stroke – Front	234 mm	9.2 in
Empty to Loaded Cylinder Stroke – Rear	149 mm	5.8 in
Rear Axle Oscillation	± 8.9°	

# 772 Off-highway Truck Bare Chassis Specifications

## Dimensions

All dimensions are approximate.

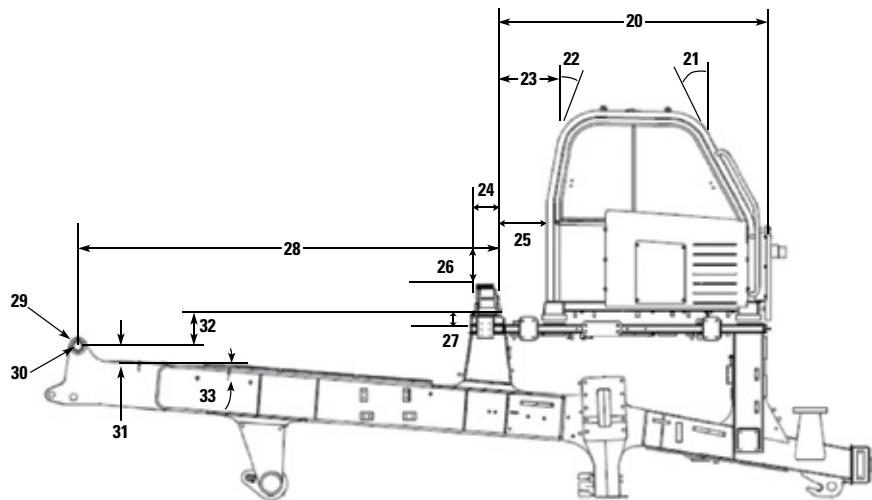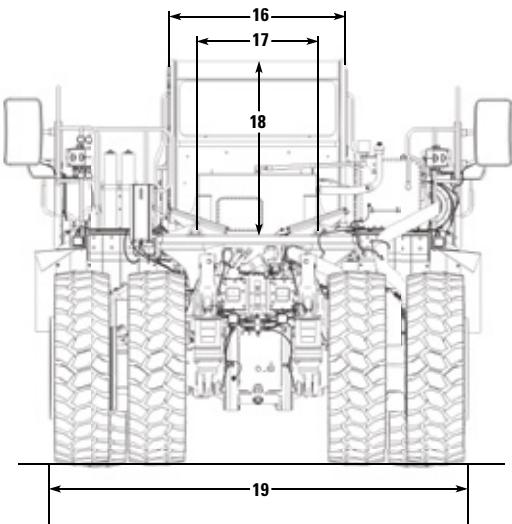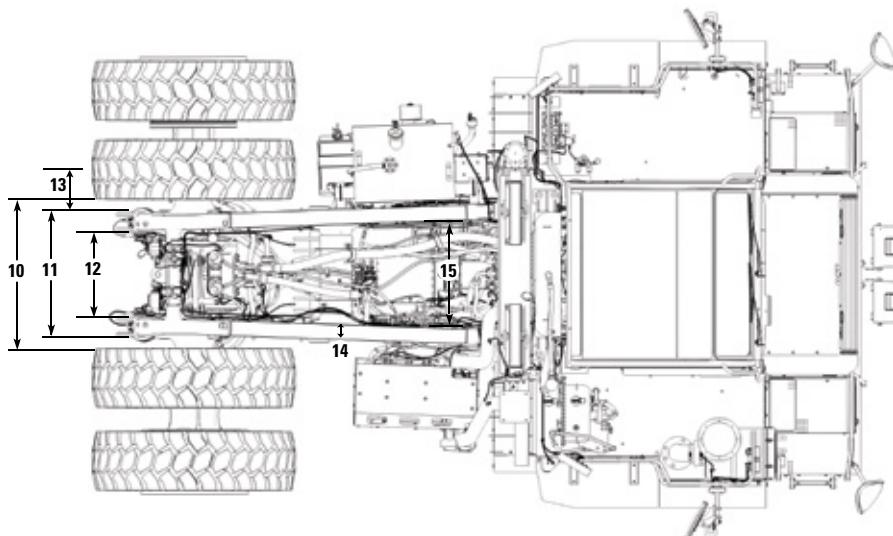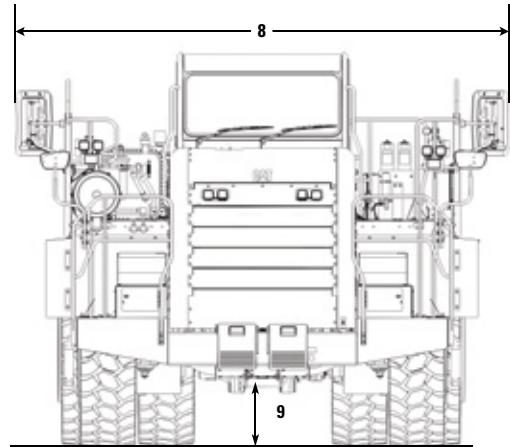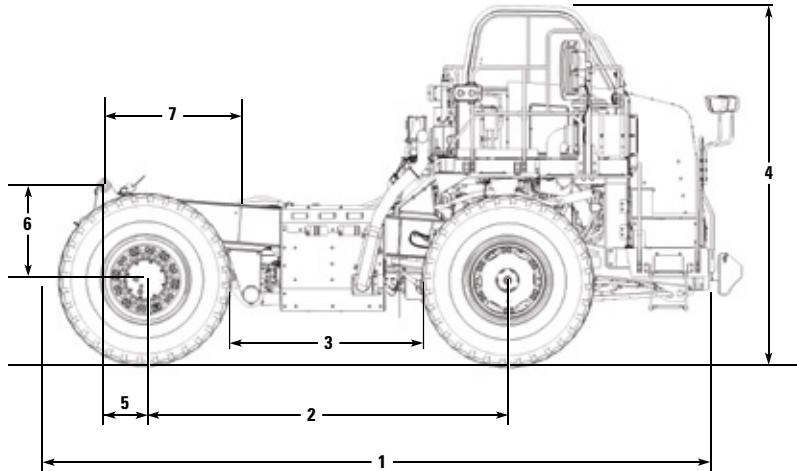

# 772 Off-highway Truck Bare Chassis Specifications

## Dimensions

1 Overall Length ** (does not include Wheel Chocks)	7449 mm	293.27 in
2 Wheel Base	3952 mm	155.59 in
3 Rear Axle to Body Pivot	2091 mm	82.32 in
4 Height to Top of ROPS **	3907 mm	154.8 in
5 Rear Axle to Body Pivot	454 mm	17.87 in
6 Vertical Distance Between Body Pivot and Rear Axle	1023 mm	40.28 in
7 Distance between Body Pivot and Hoist Cylinders - Horizontal	1224 mm	48.19 in
8 Overall Width	4971 mm	195.71 in
9 Engine Guard Clearance **	542 mm	21.34 in
10 Distance Between Hoist Cylinders	1144 mm	45.04 in
11 Distance Between Body Pivots - Outer	784 mm	30.87 in
12 Distance Between Body Pivots - Inner	551 mm	21.69 in
13 Body Pivot Bearing Width	180 mm	7.09 in
14 Frame Rail Width	139 mm	5.47 in
15 Distance Between Frame Rails	1006 mm	39.61 in
16 Cab Width	1691 mm	66.57 in
17 Distance between Rocker Pads	1200 mm	47.24 in
18 Height of the Cab from Main Beam	1695 mm	66.73 in
19 Overall Tire Width	3693 mm	145.39 in
20 Distance Between Main Beam and Cab Front	2208 mm	86.93 in
21 Cab Front Angle		28.5 degrees
22 Cab Rear Angle		10 degrees
23 Distance between Main Beam and Cab Roof	437 mm	17.20 in
24 Main Beam Width	283 mm	11.14 in
25 Distance Between Main Beam and Cab REAR	314 mm	12.36 in
26 Rocker Pad Height	268 mm	10.55 in
27 Main Beam Height	80 mm	3.15 in
28 Distance Between Body Pivot and Main Beam	3273 mm	128.86 in
29 Body Pivot Outer Radius	133.7 mm	5.26 in
30 Body Pivot Pin Diameter	75.6 mm	2.98 in
31 Distance Between Body Pivot and Frame	112 mm	4.41 in
32 Distance between Main Beam and Body Pivot Pin	249 mm	9.80 in
33 Frame Slope Angle		4.1 degrees

\*\* These dimensions may vary based on tire size, pressure and load. All dimensions are for reference only and may change for different machine configurations.

# 772 Off-highway Truck Bare Chassis Specifications

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional	Standard	Optional
<b>POWERTRAIN</b>			<b>OPERATOR ENVIRONMENT</b>	
Air cleaner with precleaner (1)	•		Advisor display	•
Air-to-Air Aftercooler (ATAAC)	•		Air conditioning	•
Aluminum radiator	•		Cigarette lighter	•
Automatic cold mode idle control	•		Coat hook	•
Auto neutral idle	•		Cup holders (4)	•
Auto stall	•		Diagnostic connection port, 24V	•
Braking system, hydraulic actuated: Automatic Retarder Control (ARC) (utilizes rear oil-cooled, multiple disc brakes), brake release motor (towing), caliper-disc (front), extended life brakes, oil-cooled – multiple disc (rear), parking, secondary, service	•		Economy modes, standard and adaptive	•
Brake wear indicator (Tier 4/Stage V)	•		Entertainment radio ready: 5 amp converter, speakers, antenna, wiring harness	•
Brake wear indicator (Tier 3 and Tier 2)		•	Fluid and fuel system monitoring (Tier 4 only)	•
Cat C15 Diesel Engine	•		Fluid and fuel system monitoring (Tier 3 and Tier 2)	•
Cat engine brake		•	Gauges/indicators: service indicator – electronic, brake oil temperature gauge, coolant temperature gauge, hour meter, tachometer, engine overspeed indicator, fuel level, speedometer with odometer, transmission gear indicator	•
Electric start	•		Heater/defroster (11 070 kCal/43,930 BTU)	•
Engine idle shutdown	•		Hoist lever	•
Second gear start	•		Horn, electric	•
Transmission – 7-speed automatic powershift with electronic clutch pressure control with advanced productivity electronic control strategy (APECS), body up-shift inhibitor, controlled throttle shifting, directional shift management, downshift inhibitor, neutral start switch, neutral coast inhibitor, reverse shift inhibitor, reverse neutralizer during dumping, programmable top gear selection	•		Lights: courtesy, dome	•
Turbocharger	•		Lights, Halogen	•
<b>ELECTRICAL</b>			Mirrors	•
Alarm backup	•		Mirrors, heated	•
Batteries, maintenance-free, 12V (2), 190 amp-hour	•		Power port, 12V	•
Lighting system: backup light, directional signals/hazard warning (front and rear LED), LED headlights with dimmer, operator access courtesy lights	•		Visibility package (WAVS)	•
			Rollover protective structure (ROPS) cab and falling object protective structure (FOPS) cab	•
			Seat, full air suspension, 4-point seat belt with shoulder harness	•
			Steering wheel – padded, tilt, and telescopic	•
			Storage compartment	•
			Sun visor, tinted glass	•
			Throttle lock	•
			Windshield wiper (intermittent) and washer	•

# 772 Off-highway Truck Bare Chassis Specifications

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>OTHER EQUIPMENT</b>			<b>CAT TECHNOLOGY PRODUCTS</b>		
Body down indicator	•		Product Link™	•	
Body safety pin (secures body in up position)	•		Traction Control System (TCS)		•
QR code - parts book	•		Advanced health	•	
Clustered lube	•				
Coolant heater		•			
Ether aid		•			
Extended life coolant to -35° C (-30° F)	•				
Fan, hydraulic demand	•				
Fuel heater		•			
Fuel tank (530 L/140 gal)	•				
Guard, driveline	•				
Guard, engine compartment	•				
Guard, engine crankcase	•				
Guard, mud	•				
Ground-level battery disconnect	•				
Ground-level engine shutdown	•				
Ground-level grease fittings		•			
Rear vision camera (WAVS)		•			
Reservoirs (separate): brake/converter/hoist, steering, transmission/torque converter	•				
Rims 15 x 33	•				
Rock ejectors	•				
Service platform, left and right-side	•				
Standard lube/auto lube		•			
Supplemental steering (automatic)	•				
Suspension, front and rear	•				
Spare rims		•			
Tie down eyes	•				
Tow hooks, front/tow pin, rear	•				
Wheel chocks		•			
Vandalism protection locks	•				

**For more information on Cat Truck Bare Chassis, contact OEM Solutions:**

[oem\\_solutions@cat.com](mailto:oem_solutions@cat.com) | [www.cat.com/oemsolutions](http://www.cat.com/oemsolutions)

PEDJ1020-02 (11-2026)

Build number: 07  
(Global)

© 2026 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

